

HV Series Load valves

Up to

- 800 lpm, 210 US gpm
- 420 bar, 6,000 psi

The HV series of loading valve gives smooth progressive pressure control in both flow directions allowing components such as cylinders or motors to be tested without re-plumbing the test connections.

The valve features the exclusive INTERPASS™ safety disc system which protects the operator, components and the environment by preventing unwanted external oil loss. In the event of overpressure the discs rupture and oil bypasses the valve internally at low pressure.

The valve features a gauge port which is ported to the inlet (in the forward direction). Combined with our flow meters or portable testers, the HV series loading valve makes testing hydraulic components and circuits on a wide range of agricultural, industrial and mobile equipment fast, efficient and safe.

Please note that the HV Series are designed for loading a system and are not suitable as a shut-off valve to hold a static load.



Manufacturers of hydraulic components and test equipment
for the Mobile, Industrial and Agricultural industries



Nuffield Road,
St. Ives, Cambs.,
PE27 3LZ, UK
Tel: +44(0)1480 397400
Fax: +44(0)1480 466555
www.webtec.co.uk
E-mail: sales@webtec.co.uk

Features

- **FLOW:** Up to 800 lpm, 210 US gpm
- **PRESSURE:** Up to 420 bar, 6000 psi
- **BI-DIRECTIONAL** loading
- **INTERPASS™** internal safety protection system with replaceable burst discs
- **SMOOTH** progressive pressure control
- **HIGH** tensile aluminium body rated at 6000 psi
- **EASY** to retro-fit



HV100LV-BU-ENG-1328.pdf 02/10
(Issue 2)

Specification

| Model number | Flow range | Port one | Port two |
|--------------|----------------------|---------------------------|---------------------------|
| HV100-B-N-6 | 100 lpm | 3/4 BSPP** | 1/2 BSPP |
| HV200-B-N-6 | 200 lpm | 1-1/16" -12UN #12 SAE ORB | 3/4 BSPP |
| HV100-S-N-6 | 25 US gpm | 1/2" NPTF | 3/4" -16UN #8 SAE ORB |
| HV200-S-N-6 | 50 US gpm | 1-1/16" -12UN #12 SAE ORB | 1-1/16" -12UN #12 SAE ORB |
| HV400-S-N-6 | 100 US gpm (400 lpm) | 1-5/16" -12UN #16 SAE ORB | 1-5/16" -12UN #16 SAE ORB |
| HV800-S-N-6 | 210 US gpm*(800 lpm) | 1-7/8" -12UN #24 SAE ORB | 1-7/8" -12UN #24 SAE ORB |

* Pressure control is limited below 86 lpm (23 US gpm) to: Max pressure (bar) = 5 times the flow (lpm) +30

**Supplied with an adaptor to provide stated port

Dimensions

| Model number | A | B | C | D | Weight |
|--------------|--------|--------|-------|--------|-----------------|
| HV100-B-N-6 | 108 mm | 122 mm | 50 mm | 62 mm | 1.3 kg (2.8 lb) |
| HV200-B-N-6 | 121 mm | 130 mm | 50 mm | 75 mm | 1.5 Kg (3.3 lb) |
| HV100-S-N-6 | 108 mm | 122 mm | 50 mm | 62 mm | 1.3 kg (2.8 lb) |
| HV200-S-N-6 | 121 mm | 130 mm | 50 mm | 75 mm | 1.5 Kg (3.3 lb) |
| HV400-S-N-6 | 95 mm | 180 mm | 50 mm | 100 mm | 2 Kg (4.4 lb) |
| HV800-S-N-6 | 114 mm | 208 mm | 76 mm | 125 mm | 2 Kg (4.4 lb) |

Functional specification

Ambient temperature: 5 to 40°C (59 to 104°F)


Fluid type: hydraulic oil

Fluid temperature: 0 to 120°C (32 to 250°F)

Max pressure: 420 bar (6000 psi)

Gauge port: 1/4"NPT

Installation

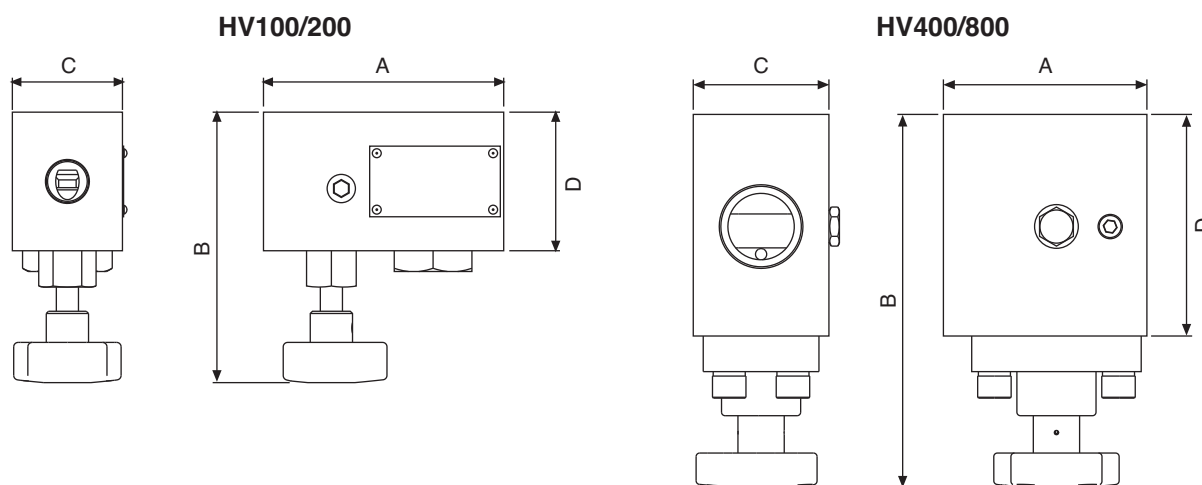

Construction material

Main body: Aluminium 2011T6

Internal parts: Steel (Grades 817M40, 722M24, 230M07)

Seals: Viton (other available on request)

Each valve is supplied with 4 spare burst discs

Accessories / options

CT: range of turbine flow blocks - from 1 to 1500 lpm (0.25 - 400 US gpm) see separate bulletin

Pressure gauges

Test points

Replacement burst discs: 6000, 5000, 4000 and 3,000 psi

HV1500 kit

Please contact sales for full details or advice.