

WPM Series Flow Monitor with Flow Rate Alarm

● Hydraulic or pneumatic models available

The WPM series in-line flow rate alarms are ideal for protecting hydraulic or pneumatic systems by sounding an alarm if flow passes a preset level. Typical applications include monitoring the minimum flow in lubrication systems and protecting against high flows. A flow rate alarm will rapidly pay for itself by reducing down time and avoiding damage to critical equipment.

All WPM flow rate alarms include all the features of a standard WP flow rate monitor in addition to having an easily adjustable dry contact switch. The switch connects via a standard Hirschmann plug and only an allen key is required for set-up. The unit is fully sealed for weather tight or wash down applications.

The WPM series flow monitors do not require straight inlet or outlet piping and can be installed in any orientation. The advanced design of the sharp edged orifice ensures good reliability over a wide viscosity range and minimises the effect of contamination. Accuracy is 2.5% over the centre third of the scale and 4% over the entire flow range.



Manufacturers of hydraulic components and test equipment
for the Mobile, Industrial and Agricultural industries



Nuffield Road,
St. Ives, Cambs.,
PE27 3LZ, UK

Tel: +44(0)1480 397400

Fax: +44(0)1480 466555

www.webtec.co.uk

E-mail: sales@webtec.co.uk

Features

- Economic early warning solution
- Easily adjustable, dry contact alarm settings
- Available for fluids or air
- Wide variety of flow ranges
- Choice of aluminium, brass & stainless steel
- Port sizes from 3/8" to 2"
- Direct reading
- Accurate within 2.5% over mid-scale, 4% FSD
- Advanced stainless steel sharp edge orifice
- Unrestricted mounting in any orientation
- Double break switches available on request



Certificate No.8242

WPM-BU-ENG-1942.pdf 09/11
(Issue 3)

Specifications

Measuring accuracy

±2.5% of full-scale in the centre third of the measuring range
±4% of full-scale over the entire scale range

Repeatability

± 1% of full scale

Flow measuring range

Hydraulic: 0.5 - 550 lpm (0.05 - 150 US gpm),
Pneumatic: 1.5 - 1300 SCFM

Maximum operating pressure

Hydraulic: Aluminium & brass monitors 240 bar, (3000 psi) stainless steel 420 bar (6000 psi)
Pneumatic: Aluminium & brass monitors 40 bar, (580 psi) stainless steel 70 bar (1000 psi).

Maximum operating temperature

115° C (240° F)

Pressure differential

See graphs below

Standard calibration fluids

Hydraulic: DTE 25 @ 43°C (40 cSt), 0.873 sg
Pneumatic: Air @ 21°C, 1.0 sg and 6.9 bar (100 psi)

Alarm switch dead-band


4% of full scale

Alarm switch contacts


SPDT (dry contact), rating 10 amps and 1/4 hp, 125 or 250 V AC, 1/2 amp, 125 V DC, 1/4 amp, 250 V DC; 3 amps, 125 V AC (Lamp load).

Pressure differential graphs categorised by size code


Series 3 (3/8" - 1/2")

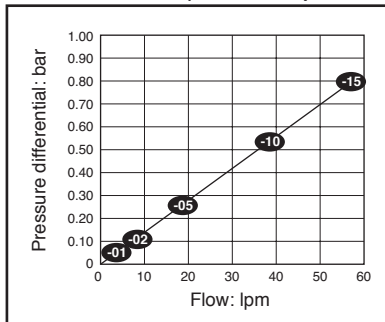

Series 4 (3/4" - 1")

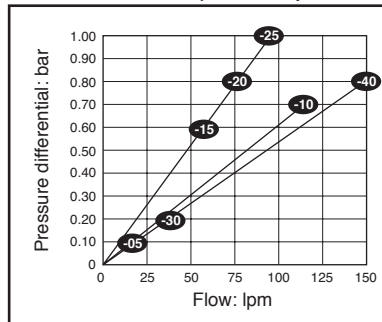

Series 5 (1 1/4" - 2")

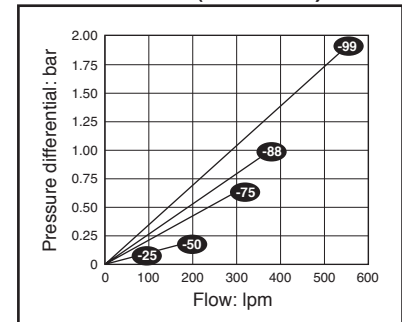

-15 = Model number (see Sales Brochure)

14.5 psi = 1 bar, 1 US gpm = 3.785 lpm

Construction

Wetted components:

High pressure casing, end ports and tapered shafts:	<i>Aluminium, Brass & Stainless Steel</i>
Seals:	<i>Buna-N (STD), EPR, Viton® or Kalrez®</i>
Transfer magnet:	<i>Teflon® coated Alnico</i>
Floating Orifice disc:	<i>Stainless Steel</i>
All other internal parts:	<i>Stainless Steel</i>


Non-wetted components:

Window tube:	Polycarbonate (STD), Pyrex
Window seals:	Buna-N (STD), Teflon®

(Teflon® is a registered trademark of DuPont)
(Viton® & Kalrez® are registered trademarks of Dow DuPont Elastomers)

Dimensions

Size code	3	4	5	5 (2" Ports)
Dim. A mm (inches)	167 (6.6)	182 (7.2)	258 (10.2)	322 (12.7)
Dim. B mm (inches)	56 (2.2)	75 (3)	97 (3.8)	97 (3.8)
Dim. C mm (inches)	101 (4)	114 (4.5)	135 (5.3)	135 (5.3)
Dim. D mm (inches)	47 (1.9)	47 (1.9)	47 (1.9)	47 (1.9)
Dim. E mm (inches)	128 (5)	127 (5)	172 (6.8)	172 (6.8)
Dim. F mm (inches)	57 (2.2)	73 (2.9)	95 (3.7)	95 (3.7)

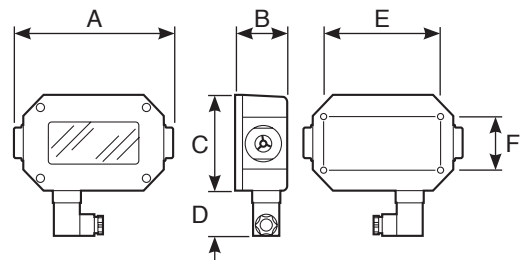

Product Selector

Standard Flow Meter Part Number
(For custom units, consult the Sales Office)

Series # WP - - Webtec Part Number

Step 1 - Style

BASIC in line for liquid	= B
Pneumatic for air and gas	= G
High Temp 200 °C (400 °F)	= H
Flow alarm, 1 switch	= M
Flow alarm, 2 switches	= N
Flow transmitter	= R
Phosphate esters	= P

Step 2 - Port / Line Size

1/4" - 1/2"	= 3
3/4" - 1"	= 4
1 1/4" - 2"	= 5

Step 3 - Material

Aluminium	= A
Brass	= B
Stainless Steel	= S

Step 4 - Pressure rating maximum

42 bar (600 psi)	= 4
(Air and gas / Aluminium and brass)	
69 bar (1000 psi)	= 5
(Air and gas / Stainless steel)	
240 bar (3500 psi)	= 6
(Liquids / Aluminium and brass)	
420 bar (6000 psi)	= 7
(Liquids / Stainless steel)	

Step 5 - Fluid:

Air and Gases	= A
Oil and 0.873 specific gravity	= H
Water and 1.0 specific gravity	= W

Step 6 - Thread porting

Size 3 available threads

1/4" NPTF	= S
1/8" NPTF	= A
1/2" NPTF	= B
9/16" -18UN #6 SAE ORB	= E
3/4" -16UN #8 SAE ORB	= F
7/8" -14UN #10 SAE ORB	= G
3/8" BSPP	= R
1/2" BSPP	= T

Size 4 available threads

3/4" NPTF	= C
1" NPTF	= D
1-1/16" -12UN #12 SAE ORB	= H
1-5/16" -12UN #16 SAE ORB	= J
3/4" BSPP	= U
1" BSPP	= V

Size 5 available threads

1-1/4" NPTF	= K
1-1/2" NPTF	= L
2" NPTF	= M
1-5/8" -12UN #20 SAE ORB	= N
1-7/8" -12UN #24 SAE ORB	= P
2" -12UN #32 SAE ORB	= Q
1-1/4" BSPP	= W
1-1/2" BSPP	= Y
2" BSPP	= X

Please note - SAE porting not available in brass

Step 7 - Flow ranges

Oil and Water LPM (USgpm)	@100 PSIG SCFM	Size
0.5-4 (0.05 - 1)	1.5 -12	= 01 3 only
0.5-4 (0.1 - 1) water		
1-8 (0.2-2)	4-23	= 02 3 & 4
2-19 (0.5-5)	5-50	= 05 3 & 4
4-38 (1-10)	10-100	= 10 3 & 4
4-56 (1-15)	25-150	= 15 3 & 4
10-75 (2-20)	20-215	= 20 4 only
10-100 (2-25)	20-250	= 25 4 & 5
10-115 (3-30)	30-330	= 30 4 only
15-150 (4-40)	30-400	= 40 4 only
15-190 (5-50)	40-500	= 50 4 only
15-190 (5-50)	30-470	= 50 5 only
30-280 (8-75)	30-750	= 75 5 only
40-375 (10-100)	150-900	= 88 5 only
75-550 (20-150)	150-1300	= 99 5 only

Step 8 - Optional flow directions

Uni-directional	=
Bi directional	= BI
Reverse flow	= RF

Not all flow ranges are available with Bi and reverse directional options, please consult the sales office.

Case Drain Monitor

Series # WPC - - Webtec Part Number

Port / Line Size

1/2"	= 3
3/4" - 1"	= 4

Material

Aluminium	= A
-----------	-----

Pressure Rating Max.

70 bar (1000 psi)	= 5
-------------------	-----

Fluid Media

Oil and 0.873 specific gravity	= H
Water and 1.0 specific gravity	= W

Flow ranges (oil and water)

LPM (USgpm)	Size
0.5-4 (0.05 - 1)	= 01 3 only
0.5-4 (0.1 - 1) water	
1-8 (0.2-2)	= 02 3 & 4
2-19 (0.5-5)	= 05 3 & 4
4-38 (1-10)	= 10 3 & 4
4-56 (1-15)	= 15 3 & 4
10-75 (2-20)	= 20 4 only
10-100 (2-25)	= 25 4 & 5
10-115 (3-30)	= 30 4 only

Thread Type

Porting (All Female)	Size
1/2" BSPP	= T 3 only
3/4" BSPP	= U 4 only
1" BSPP	= V 4 only
1/2" NPTF, dry seal	= B 3 only
3/4" NPTF, dry seal	= C 4 only
1" NPTF, dry seal	= D 4 only